








BH型無熔線斷路器（分電盤用）卡式

框架容量 (AF)		50			100			50		100		
型式		BQL						BQS				
外觀												
極數 (P)		1		2		3		1		2		
 外型及安裝尺寸 (mm)		a	25		50		75		25		50	
		b	95									
		c	58.5									
		ca	77.5									
		bb	100									
		aa	0		25		50		0		25	
額定電壓 (V) A.C		110/220		220				110/220		220		
額定電流 (A) (基準周圍溫度 40°C)		10,15,20,30,40,50		10,15,20,30,40,50,60,75,100				10,15,20,30,40,50		10,15,20,30,40,50,60,75,100		
啟斷容量	IC:kA	110V	15		—				25/22		25/22	
		220V	10		15				—		25/22	
		380V	—		10				—		16/15	
重量 (kg)		0.18		0.37		0.55		0.18		0.37		

特性曲線 & 外型尺寸

- BQL, BQS SERIES

- 外型尺寸圖

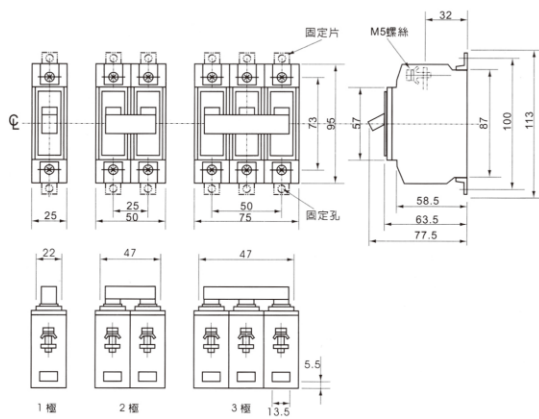

- 過電流操作特性曲線

